

LPB Communications, Inc. 960 Brook Road, Unit 5 Conshohocken, PA 19428 USA 1 (610) 825-4100 www.lpbinc.com

THANK YOU FOR PURCHASING THE LPB SILENT BOOM!

The Silent Boom was designed to work with any common microphone cable, mounts and microphones. It's flexibility is found in the precut cable channel, the Delrin sleeve, and a full spring kit supplied with each Boom. Below are some simple instructions to make it easy to set up.



To install the Silent Boom without the riser, just drill a 3/4" hole in the table and slip in the low friction Delrin sleeve. If you are using the Riser, mount it to the table and slip the Delrin sleeve into the top before inserting the Silent Boom

Every Silent Boom includes a complete multi-weight spring set that allows you to use any microphone without concern. Most common lightweight microphones (ie the EV635A) need the two light springs. Most middleweight microphones (RE20, SM7, etc...) will use one of each weight. True heavyweights like the RCA 44BX will need both heavy springs. Experiment to find your preferred tension.






The Springs mount on the upper arm of the Silent Boom. Each Boom ships with the lower heavy spring set factory installed. Only install the upper pair!

Some pressure may be required to fit the springs over the mounting screws, this will also ensure that the springs cannot be dislodged in use.



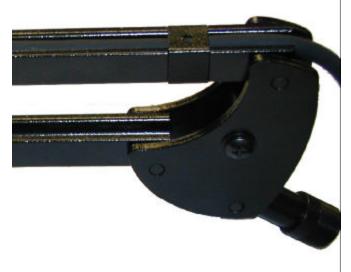

Simply press the cable into the pre-cut channel along the outside edge of the Silent Boom and you are ready to go! A set of clips is supplied to ensure that the cable cannot be pulled loose (and to secure very thin cables). These slip into place with a "click" as they clip around the Boom. Their locations (4) are precut in the Boom and easy to find.

That's it – You're Done!



Questions? Comments? Station Photos?

Contact us at: support@lpbinc.com



LPB Communications, Inc. 960 Brook Rd Unit 5 Conshohocken, PA 19428 USA 1 (610) 825-4100 www.lpbinc.com