

ST-220 PROFESSIONAL STEREO TONE ARM

FOR BROADCAST APPLICATIONS

USING HIGH COMPLIANCE CARTRIDGES



FEATURES


- CONSTRUCTION: Light alloy arm, with low-mass cartridge shell
- MOUNTING: 7/8" diameter single hole, 1" long threaded shank


ROTATION: Miniature precision ball bearing


- LATERAL BALANCE: Adjustable, to compensate for variations in center of gravity between various cartridges
- TRACKING FORCE ADJUSTABLE: Movable weight, with locking screw, adjusts tracking force for any cartridge
 - M HEIGHT ADJUSTABLE: Locking screws on shafts of arm and rest adjust height of arm from 40-60 mm (1-9/16'' - 2-3/8'')
- CARTRIDGE SHELL REMOVABLE: Uses international standard 4 pin connector
- CONNECTING CABLE PLUG-IN: 5' cable plugs into base of arm, has color-coded phono plugs and ground wire

SPECIFICATIONS

TOTAL LENGTH	
EFFECTIVE LENGT	H · · · · · · · 220 mm (8-21/32'')
OVERHANG	
OFFSET ANGLE	
LATERAL BALANCE	E Adjustable, all cartridges
STYLUS PRESSURE	··· Adjustable, 1-6 grams recom-
	mended, depending on cartridge
TRACKING ERROR .	+ 4° - 1°





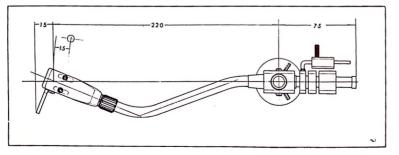

5651 FLORIN-PERKING ROAD BACRAMENTO, CALIFORNIA 95828 (916) 383-5353 A DIVISION OF COMPUTER EQUIPMENT CORPORATION